


Semi Exterior Clear Water Based Coating System


The following coating systems are ideal for use in semi exterior applications e.g. under pergolas and eaves.

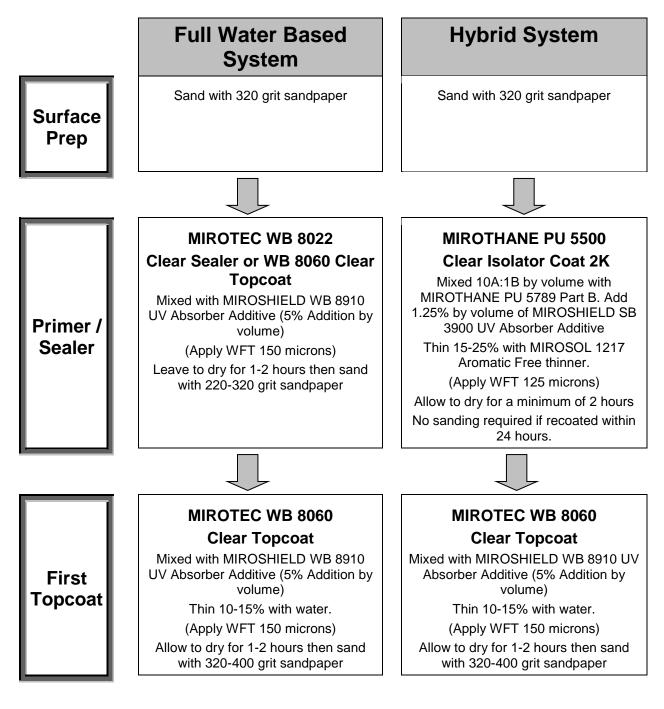

Issued 10 August 2014

Page 1

The information in this Technical Bulletin represents typical values. Application variables affect product performance therefore this information should be used as a guide. The user must satisfy themselves as to the suitability of this product for their requirements. Mirotone assumes no liability for use of this information.

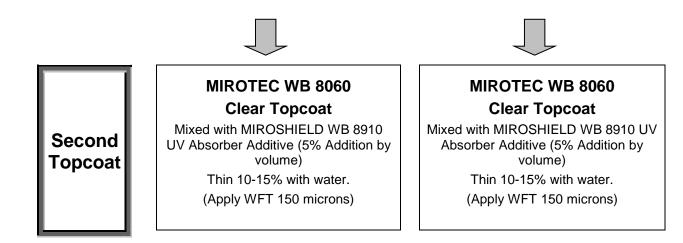

MIROSHIELD SB 3900 & WB 8910 UV Absorber Additives increase the durability of the clear coating to which they are added.

The hybrid system listed above will provide the best protection of the substrate in a semi exterior environment and will minimise the risk of tannin bleed.

Ensure that you refer to the Product Data Sheet & MSDS before applying any Mirotone Coating System.

Note: The life expectancy of a coating will vary according to the environmental conditions that the item is subjected to, the quality of maintenance performed by the customer and it will vary according to the material to which the coating is applied. It is important to note the warnings on the product data sheets to ensure that these products are suitable for the intended end use of the coated article. Mirotone recommends cleaning with a water damp cloth or microfiber cloth for best in service performance.

www.mirotone.com

Issued 10 August 2014

Page 2

The information in this Technical Bulletin represents typical values. Application variables affect product performance therefore this information should be used as a guide. The user must satisfy themselves as to the suitability of this product for their requirements. Mirotone assumes no liability for use of this information.